



TECHNICAL BULLETIN TB04-2015

Regarding: Tron AIS TR-8000, Check Firmware and upgrade if necessary


Jotron recertified our Tron AIS TR-8000 in the summer 2014 to be compliant with latest specifications from ITU (ITU.R 1371-5) and IEC (IEC61993-2{Ed2}) and therefore it is critical that both Transponder unit and Display unit uses same "main" versions of Firmware:



Transponder Firmware	Display Firmware	Compatibility?
01.00.x	01.00.x	✓
01.01.x	01.01.x	✓
01.00.x	01.01.x	✗
01.01.x	01.00.x	✗

So if either Transponder or Display is replaced with a new one, or Firmware is only upgraded on one of the units, make sure that both uses the same "main" versions of Firmware.
(Same "main" version means that the 4 first digits in the Firmware version are the same)

See screenshot from Display here (newest version pr. Feb 2015) showing Firmware version of both Display and Transponder.

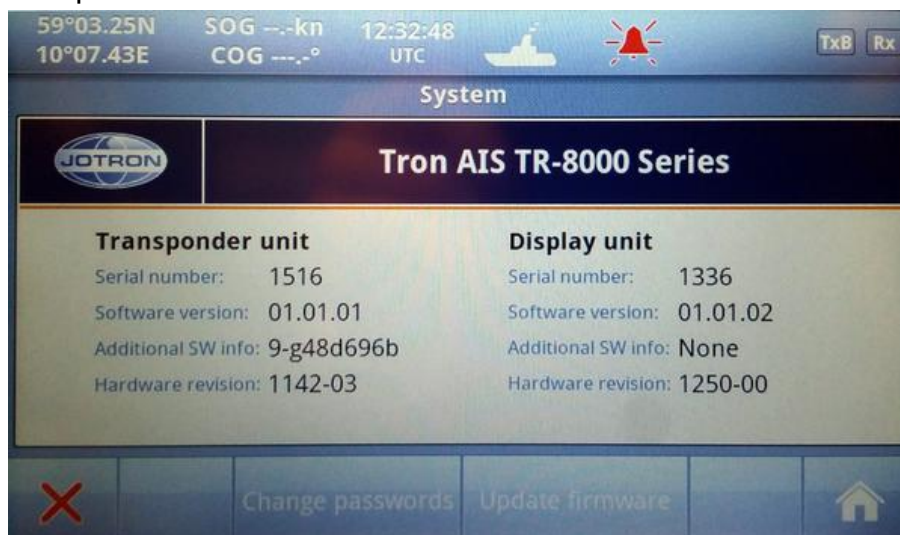

If your Firmware is incompatible according to table above, please contact your Dealer/Distributor to upgrade unit(s).

Updated firmware is available for Dealers/Distributors at our support web:

<http://support.jotron.com>

Jotron AS
5th March 2015

DNB Bank asa | 0021 Oslo | Norway | Bank account: 24400508514 | IBAN: NO6624400508514 | BIC: DNBANOKK | Reg.no.: NO917713324 MVA
QA Certificate: NS-EN ISO 9001:2008/ISO 14001:2004

www.jotron.com

Jotron AS
P.O. Box 54 | NO-3281 Tjodalving | Norway

Tel: +47 33 13 97 00
Fax: +47 33 12 67 80