




Disassemble, Disconnect and Recycle Tron 30S

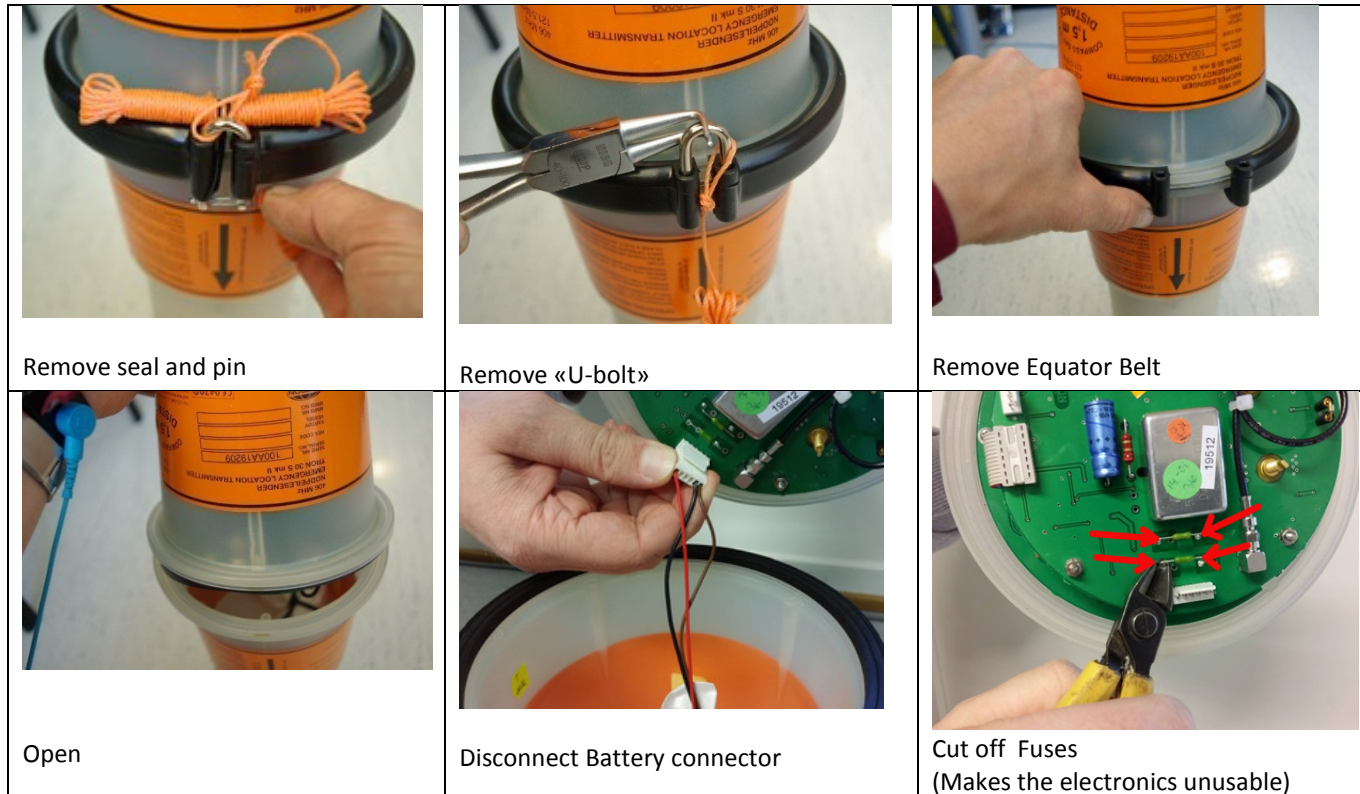

Remove seal and pin

Remove «U-bolt»

Remove Equator Belt

Open

Disconnect Battery connector

Cut off Fuses
(Makes the electronics unusable)

Recycle the different parts:

	Part	How	Note
1	Battery	Do NOT throw in waste bin, but recycle as "Haz.mat" (Dangerous goods). - Europe: According to Directive 2006/66/EC - USA: The Big Green box	Contains high energy Lithium Metal batteries of type SAFT LSH-20, see MSDS/PSDS (2011) here and Battery Information sheet here .
2	Electronics	Do NOT throw in waste bin, but recycled according to legal procedures regarding waste electronic: - Europe: WEEE – see more info: 1) http://ec.europa.eu/environment/waste/weee/index_en.htm 2) http://erp-recycling.org/ - USA: http://www.epa.gov/epawaste/conserve/materials/ecycling/index.htm	May contain: <ul style="list-style-type: none"> • Beryllia Oxide (BeO) <div data-bbox="1257 1693 1358 1818" data-label="Image"> </div> • Lead (Pb) • Copper(Cu) • Tin (Sn) • Other metals
3	Plastic	Contains mostly Polycarbonate (Lexan) , see information on plastic recycling here: http://en.wikipedia.org/wiki/Plastic_recycling	<div data-bbox="1246 2018 1366 2152" data-label="Image"> </div>